

# G204 – 3U CompactPCI® Serial M-Module Carrier Board

- 1 M-Module slot
- -40 to +85°C with qualified components
- PICMG CPCI-S.0 CompactPCI® Serial peripheral card




The G204 is a 3U M-Module carrier board for universal I/O on the CompactPCI® Serial bus. It allows high flexibility in applications such as data acquisition or process control.

One M-Module may be installed on the G204, which needs only one slot on the CompactPCI® Serial bus. M-Modules are screwed tightly on the board and require no separately mounted transition panel.

The G204 offers developers instant access to more than 70 different M-Modules for I/O in fields such as process I/O, measurement, instrumentation, motion control, communication, and development.

## Diagram

- ◇ F Front connector
- R Rear I/O connector
- B Onboard connector

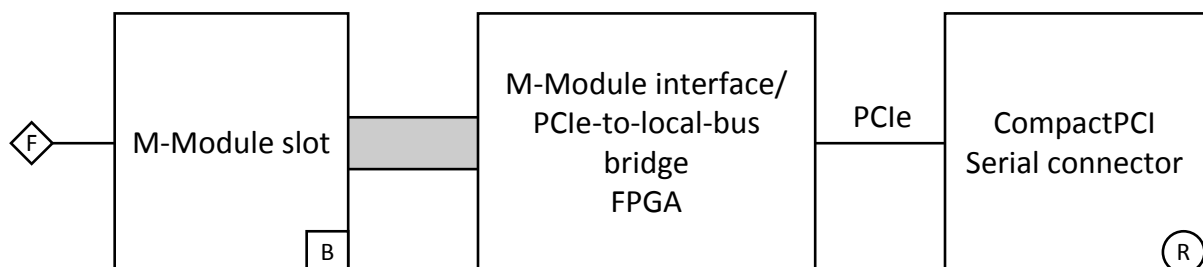

## Technical Data

<b>M-Module Slots</b>	<ul style="list-style-type: none"> <li>■ One M-Module slot</li> <li>■ Compliant with M-Module standard</li> <li>■ Characteristics: A08, A24, D08, D16, D32, INTA, TRIGI, TRIGO</li> </ul>
<b>Peripheral Connections</b>	<ul style="list-style-type: none"> <li>■ Via front panel</li> </ul>
<b>CompactPCI® Serial</b>	<ul style="list-style-type: none"> <li>■ Compliance with CompactPCI® Serial PICMG CPCI-S.0 Specification</li> <li>■ Peripheral slot</li> <li>■ 32-bit/33-MHz PCIe®-to-M-Module bridge <ul style="list-style-type: none"> <li>□ FPGA-based</li> <li>□ Target on PCIe® bus</li> </ul> </li> </ul>
<b>Electrical Specifications</b>	<ul style="list-style-type: none"> <li>■ Supply voltage/power consumption: <ul style="list-style-type: none"> <li>□ +12 V (-5%/+5%), 100 mA typ. (without M-Module)</li> </ul> </li> </ul>
<b>Mechanical Specifications</b>	<ul style="list-style-type: none"> <li>■ Dimensions: conforming to CompactPCI® Serial specification for 3U boards</li> <li>■ Front panel: 4HP with ejector, cut-out for front connector of M-Module</li> <li>■ Weight: approx. 130 g (without M-Modules)</li> </ul>
<b>Environmental Specifications</b>	<ul style="list-style-type: none"> <li>■ Temperature range (operation): <ul style="list-style-type: none"> <li>□ -40..+85°C (qualified components)</li> <li>□ Airflow: min. 1.0 m/s</li> </ul> </li> <li>■ Temperature range (storage): -40..+85°C</li> <li>■ Relative humidity (operation): max. 95% non-condensing</li> <li>■ Relative humidity (storage): max. 95% non-condensing</li> <li>■ Altitude: -300 m to +3000 m</li> <li>■ Shock: 50 m/s<sup>2</sup>, 30 ms (EN 61373)</li> <li>■ Vibration (function): 1 m/s<sup>2</sup>, 5 Hz - 150 Hz (EN 61373)</li> <li>■ Vibration (lifetime): 7.9 m/s<sup>2</sup>, 5 Hz - 150 Hz (EN 61373)</li> <li>■ Conformal coating on request</li> </ul>
<b>MTBF</b>	<ul style="list-style-type: none"> <li>■ 2 177 300 h @ 40°C according to IEC/TR 62380 (RDF 2000)</li> </ul>
<b>Safety</b>	<ul style="list-style-type: none"> <li>■ Flammability <ul style="list-style-type: none"> <li>□ PCB manufactured with a flammability rating of 94V-0 by UL recognized manufacturers</li> </ul> </li> </ul>
<b>EMC Conformity</b>	<ul style="list-style-type: none"> <li>■ EN 55022 (radio disturbance)</li> <li>■ IEC 61000-4-2 (ESD)</li> <li>■ IEC 61000-4-3 (electromagnetic field immunity)</li> <li>■ IEC 61000-4-6 (conducted disturbances)</li> </ul>
<b>Software Support</b>	<ul style="list-style-type: none"> <li>■ M-Module drivers for Windows®, VxWorks®, Linux, QNX®, OS-9® as supported</li> <li>■ <a href="#">Basic board driver included in MDIS system package for the respective operating system</a></li> </ul>

## Configuration & Options

### Options

#### Cooling Concept

- Also available with conduction cooling in MEN CCA frame

Please note that some of these options may only be available for large volumes. Please ask our sales staff for more information.

## Ordering Information

<b>Standard G204 Models</b>	<b>02G204-00</b>	G204, 3U CompactPCI® Serial (CPCI-S.0) M-Module Carrier, -40..+85°C screened
<b>Miscellaneous Accessories</b>	<b>05M000-17</b>	25 mounting screw sets to fix M-Modules on carrier boards
<b>Software: Miscellaneous</b>		Driver software for Windows®, Linux, VxWorks®, QNX®, RTX and OS-9® is available for the different M-Modules. Please refer to the M-Module/s of your choice for information and download.  A basic board driver for this carrier card is included in the MDIS system package for the respective operating system. You can find an overview of available packages for download under <a href="http://www.men.de/mdis">www.men.de/mdis</a> .
For operating systems not mentioned here <a href="#">contact MEN sales</a> .		
<b>Documentation</b>		Compare Chart 3U CompactPCI® Serial CPU and I/O cards » <a href="#">Download</a>
	<b>20G204-00</b>	G204 User Manual

## Contact Information

### Germany

MEN Mikro Elektronik GmbH  
Neuwieder Straße 3-7  
90411 Nuremberg  
Phone +49-911-99 33 5-0  
Fax +49-911-99 33 5-901

info@men.de  
www.men.de

### France

MEN Mikro Elektronik SAS  
18, rue René Cassin  
ZA de la Châtelaine  
74240 Gaillard  
Phone +33 (0) 450-955-312  
Fax +33 (0) 450-955-211

info@men-france.fr  
www.men-france.fr

### USA

MEN Micro Inc.  
860 Penllyn Blue Bell Pike  
Blue Bell, PA 19422  
Phone (215) 542-9575  
Fax (215) 542-9577

sales@menmicro.com  
www.menmicro.com

The date of issue stated in this data sheet refers to the Technical Data only. Changes in ordering information given herein do not affect the date of issue. All brand or product names are trademarks or registered trademarks of their respective holders.

MEN is not responsible for the results of any actions taken on the basis of information in the publication, nor for any error in or omission from the publication.

MEN expressly disclaims all and any liability and responsibility to any person, whether a reader of the publication or not, in respect of anything, and of the consequences of anything, done or omitted to be done by any such person in reliance, whether wholly or partially, on the whole or any part of the contents of the publication.

The correct function of MEN products in mission-critical and life-critical applications is limited to the environmental specification given for each product in the technical user manual. The correct function of MEN products under extended environmental conditions is limited to the individual requirement specification and subsequent validation documents for each product for the applicable use case and has to be agreed upon in writing by MEN and the customer. Should the customer purchase or use MEN products for any unintended or unauthorized application, the customer shall indemnify and hold MEN and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim or personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that MEN was negligent regarding the design or manufacture of the part.

In no case is MEN liable for the correct function of the technical installation where MEN products are a part of.

Copyright © 2015 MEN Mikro Elektronik GmbH. All rights reserved.