


F204 - 3U CompactPCI®/PXI™ M-Module™ Carrier Board

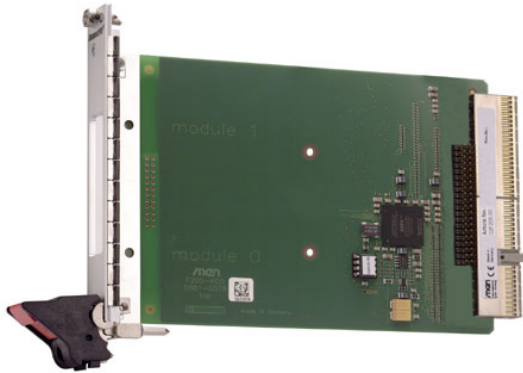

- 1 CompactPCI® bus slot
- 1 M-Module™ slot
- Flexible PXI™ trigger routing
- -40 to +85°C versions with qualified components

The F204 is a 3U M-Module™ carrier board for universal I/O on the CompactPCI® bus as well as on PXI™ for automated testing requirements. It allows high flexibility in applications such as data acquisition or process control. The F204 supports all eight PXI™ trigger lines as defined in the PXI™ specification. One M-Module™ may be installed on the F204, which needs only one slot on either the CompactPCI® bus or on the PXI™ bus. M-Modules™ are screwed tightly on the

board and require no separately mounted transition panel.

The F204 offers developers instant access to more than 70 different M-Modules™ for I/O in fields such as process I/O, measurement, instrumentation, motion control, communication, and development.

Technical Data

M-Module™ Slots

- One M-Module™ slot
- Compliant with M-Module™ standard
- Characteristics: A08, A24, D08, D16, D32, INTA, TRIGI, TRIGO

Peripheral Connections

- Via front panel

CompactPCI® Bus

- Compliance with CompactPCI® Specification 2.0 R2.1
- Only one slot required on the 3U CompactPCI® bus
- 32-bit/33-MHz PCI-to-M-Module™ bridge
 - FPGA-based
 - Compliant with PCI Specification 2.2
 - Target on PCI bus
- V(I/O): +5V (+3.3V on request)

PXI™

- Eight trigger lines compliant with PXI™ Specification R1.0
- Routing of PXI™ trigger lines to M-Module™ interface TRIGA, TRIGB

Electrical Specifications

- Supply voltage/power consumption:
 - +5V (-3%/+5%), 20mA typ.
 - +3.3V (-3%/+5%), 20mA typ.
- MTBF: 1,046,000h @ 40°C (derived from MIL-HDBK-217F)

Mechanical Specifications

- Dimensions: conforming to CompactPCI® specification for 3U boards
- Front panel: aluminum with 1 handle, cut-out for front connector of M-Module™
- Weight: 130g (without M-Modules™)

Environmental Specifications

- Temperature range (operation):
 - 0..+60°C or -40..+85°C
 - Airflow: min. 10m³/h
- Temperature range (storage): -40..+85°C
- Relative humidity (operation): max. 95% non-condensing
- Relative humidity (storage): max. 95% non-condensing
- Altitude: -300m to + 3,000m
- Shock: 15g/11ms
- Bump: 10g/16ms
- Vibration (sinusoidal): 2g/10..150Hz
- Conformal coating on request

Safety

- PCB manufactured with a flammability rating of 94V-0 by UL recognized manufacturers


EMC

- Tested according to EN 55022 (radio disturbance), IEC1000-4-2 (ESD) and IEC1000-4-4 (burst)

Software Support

- M-Module™ drivers for Windows®, VxWorks®, Linux, QNX®, OS-9® as supported

Diagram

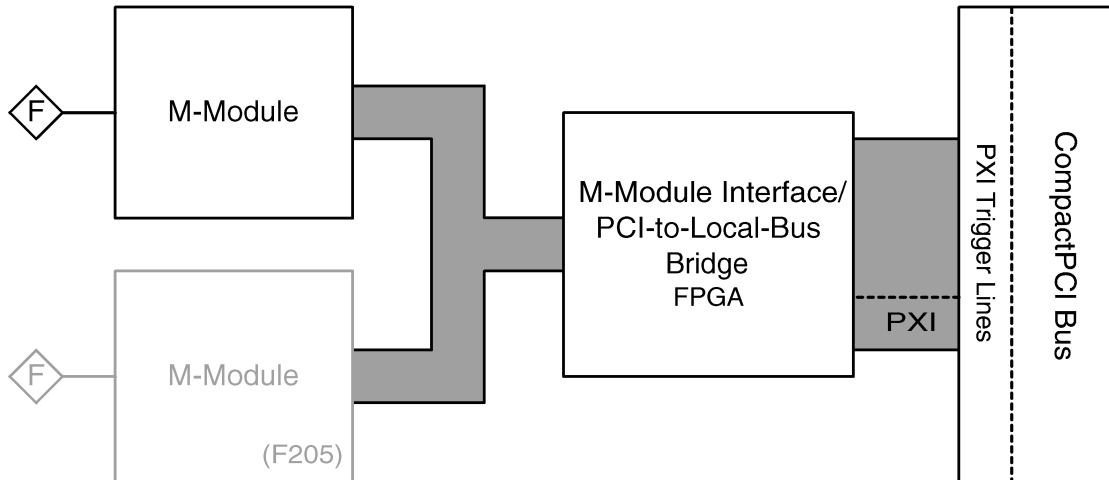

Configuration & Options

Standard Configurations

Article No.	M-Module™ Slots	M-Module™ Characteristics	Operation Temperature
02F204-00	1	A08/D16	0..+60°C
02F204-01	1	A08/D16	-40..+85°C
02F204-02	1	A24/D32	-40..+85°C
02F205-00	2	A08/D16	0..+60°C
02F205-01	2	A08/D16	-40..+85°C
02F205-05	2	A24/D32	-40..+85°C

Options

M-Module™ Slots

- 1 or 2

M-Module™ Characteristics

- A08/D16 or A24/D32

Operation Temperature

- 0..+60°C
- -40..+85°C

Ordering Information

Standard Hardware

- 02F204-00** M-Module™ carrier board for 1 M-Module™, 0...+60°C
- 02F204-01** M-Module™ carrier board for 1 M-Module™, -40...+85°C screened
- 02F204-02** M-Module™ carrier board, 1 slot, A24 access, -40...+85°C qualified

Miscellaneous

- 05M000-15** Front-panel cover for M-Module™ cut-outs at front panels, snap-in, 10 pcs
- 05M000-17** 25 mounting screw sets to fix M-Modules™ on carrier boards

Documentation

- 20APPN001** Application Note: Using MEN +5V CompactPCI® Boards with +3.3V V(I/O)
- 20F204-00** F204/F205 User Manual

For the most up-to-date ordering information and direct links to other data sheets and downloads, see the F204 online data sheet under » www.men.de.

Diamond Point International (Europe) Ltd

Suite 13, Ashford House, Beaufort Court

Sir Thomas Longley Road, Rochester, Kent, ME2 4FA, UK

Phone 01634 300900 - Fax 01634 722398 - Email sales@dpie.com – Web www.dpie.com www.dpieshop.com



www.dpie.com

Germany

MEN Mikro Elektronik GmbH
Neuwieder Straße 5-7
90411 Nuremberg
Phone +49-911-99 33 5-0
Fax +49-911-99 33 5-901
E-mail info@men.de
www.men.de

France

MEN Mikro Elektronik SA
18, rue René Cassin
ZA de la Châtelaine
74240 Gaillard
Phone +33 (0) 450-955-312
Fax +33 (0) 450-955-211
E-mail info@men-france.fr
www.men-france.fr

USA

MEN Micro, Inc.
24 North Main Street
Ambler, PA 19002
Phone (215) 542-9575
Fax (215) 542-9577
E-mail sales@menmicro.com
www.menmicro.com

The date of issue stated in this data sheet refers to the Technical Data only. Changes in ordering information given herein do not affect the date of issue.

All brand or product names are trademarks or registered trademarks of their respective holders.

Information in this document has been carefully checked and is believed to be accurate as of the date of publication; however, no responsibility is assumed for inaccuracies. MEN Mikro Elektronik accepts no liability for consequential or incidental damages arising from the use of its products and reserves the right to make changes on the products herein without notice to improve reliability, function or design. MEN Mikro Elektronik does not assume any liability arising out of the application or use of the products described in this document.

The products of MEN Mikro Elektronik are not suited for use in nuclear reactors and for application in medical appliances used for therapeutical purposes.

Application of MEN's products in such plants is only possible after the user has precisely specified the operation environment and after MEN Mikro Elektronik has consequently adapted and released the product.

Copyright © 2008 MEN Mikro Elektronik GmbH. All rights reserved.



mikro elektronik
gmbh • nürnberg