


FlashDrive/104

FlashDrive/104 is a flash based, solid state storage module designed using the latest NAND technology. This rugged storage module is a robust, drop-in replacement for magnetic hard drives that can be prone to mechanical failures or corruption due to shock and vibration.

Engineered with harsh conditions in mind, this solid state drive has no moving parts and offers high performance and reliability for any operating environment.

FlashDrive/104's high density memory chips provide immense storage capabilities to ensure reduced latency and faster data transfer. This module retains your data files and programs and protects data from harmful external disruptions such as extreme temperatures and electrical disturbances.

FlashDrive/104 supports every platform, every operating system and requires no drivers.

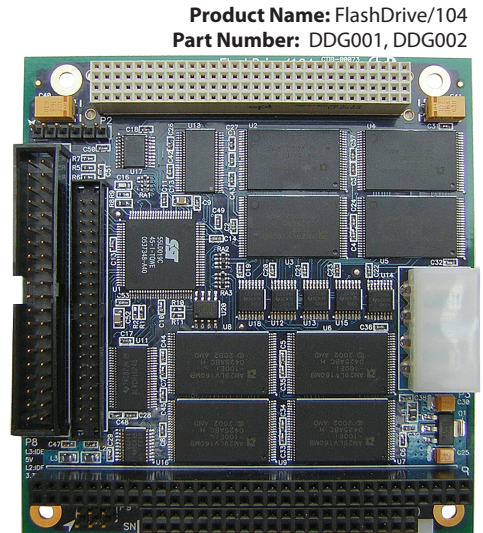

FEATURES

- ✓ *PC/104 form factor for any platform*
- ✓ *Hard Disk Interface features: ATA/IDE, 10MB/s read/write, supports PIO Mode-4 and multi-word DMA Mode-2, standard Master/Slave*
- ✓ *Flash Storage models: 4,8,16 or 32GB available*
- ✓ *Global write protect*
- ✓ *On-board flash controller features: Embedded Flash, wear levelling algorithms, bad block management and error code correction*

Specifications	
NAND Flash	4, 8, 16 or 32GB models
Hard Disk Interface	Standard ATA/IDE interfaces DDG / DEG: 5V Tolerant signaling, DGG: 3.3V CMOS signaling
Data Transfer Rate	Read/write up to 10MB per second
Connectors	Standard - 40-pin, 100" and 2.5" - 44-pin, 2mm
Temperature	Operating Temperature: 0°C to 70°C (32°F to 158°F) Industrial Temperature: -40°C to 85°C (-40°F to 185°F) Humidity: 95% non-condensing
Operating System	Supports all operating systems - drivers not required
Resistance	Resistant to dirt, shock, vibration and extreme temperatures
Power Requirements	+5 V DC (+/- 5%)
Dimensions	Length: 9.5885 cm/3.775" Width: 9.017 cm/3.55"
Form Factor	PC/104 form factor
Platform	Suitable for any platform
Compliance	RoHS compliant
Warranty and Support	Lifetime warranty and free technical support