


# R104

Optoisolated Input and relay Output Board

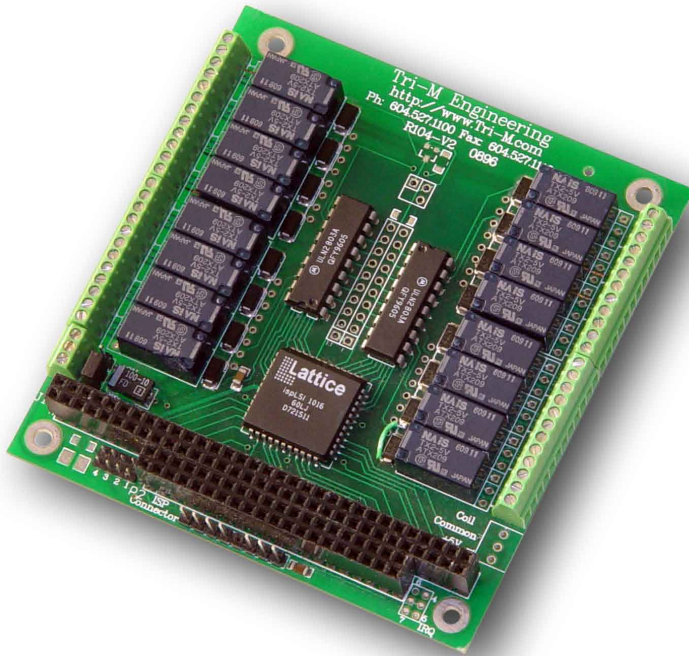

## specifications

### R104-16DI and R104-16DO

- Relay Output Control

The 16 inputs are accessed through I/O memory reads. The inputs are grouped in sets of four, and the group I/O memory address is an offset from the base decode address.

### R104-16DO

- Relay Output Control

The 8 relays are accessed through I/O memory writes. The relays are grouped in sets of four, and the group I/O memory address is an offset from the base decode address.

## features

- PC/104 Compliant, 3.75"W x 3.55"L
- 16 input, 8 input & 8 relays, or 16 relays
- Contract rating 2 amperes @ 30VDC
- I/O mapped
- Multiple R104 boards can be stacked

## Ordering Information



this product is  
manufactured by:



## Part Number

## Description

R104-88	8 Inputs and 8 Relay Outputs
R104-DI	16 Optoisolated Inputs
R104-DO	16 Relay Outputs